

# ADTECH

95 Mt. Read Blvd # 149  
Rochester, New York 14611 USA  
Phone: 1.585.698.1845  
Fax: 1.585.697.0445

[www.adtech-inst.com](http://www.adtech-inst.com)

## INSTRUMENT POWER SUPPLY AC TO DC MODEL NO. IPS 2402

THE ADTECH MODEL IPS 2402 AC TO DC POWER SUPPLY PROVIDES AN IDEAL SOLUTION FOR POWERING TWO-WIRE AND THREE-WIRE INSTRUMENTS.

THE IPS 2402 ACCEPTS 115 VAC OR 230 VAC (JUMPER SELECTABLE) AND PROVIDES AN ISOLATED OUTPUT OF 26 VDC AT 50 MADC.

IT CAN POWER UP TO (2) TWO 4-20 MA LOOPS SUCH AS ADTECH'S 100,200 OR 300 SERIES INSTRUMENTS, OR UP TO (16) SIXTEEN OF ADTECH'S LOW POWER 300L SERIES TRANSMITTERS.


THE OUTPUT IS DIODE COUPLED FACILITATING AUTONEERING WITH OTHER 24 VDC POWER SUPPLIES.

THE OUTPUT IS DIODE COUPLED FACILITATING AUCTIONEERING WITH OTHER 24 VDC POWER SUPPLIES.

THE OUTPUT IS ALSO OVER VOLTAGE AND SHORT CIRCUIT PROTECTED WHICH PROVIDES POWER SUPPLY SECURITY AND HIGH LOOP INTEGRITY.

THE IPS 2402 PROVIDES 1500 VAC OR 2100 VDC HIPOT ISOLATION.

DIN MOUNTING IS SUPPLIED AS STANDARD. SURFACE MOUNT (OPTION H 26) AND SNAP TRACK (OPTION H 25) ARE AVAILABLE AT NO EXTRA COST. SPECIFY.

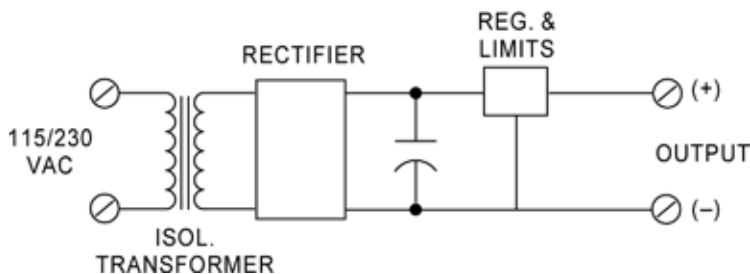



### TYPICAL APPLICATIONS

- POWER TWO-WIRE TRANSMITTER
- POWER THREE-WIRE TRANSMITTER
- PROVIDE ISOLATED DC POWER
- PROVIDE EXCITATION POWER FOR SENSORS

### FEATURES

- 115 VAC OR 230 VAC  $\pm 10\%$
- 47 TO 440 HZ INPUT
- 26 VDC OUTPUT, DIODE COUPLED FOR EASE OF AUCTIONEERING
- OUTPUT: SHORT-CIRCUIT AND OVER-VOLTAGE PROTECTED
- INPUT-OUTPUT ISOLATION 1500 VAC, 2100 VDC HIPOT



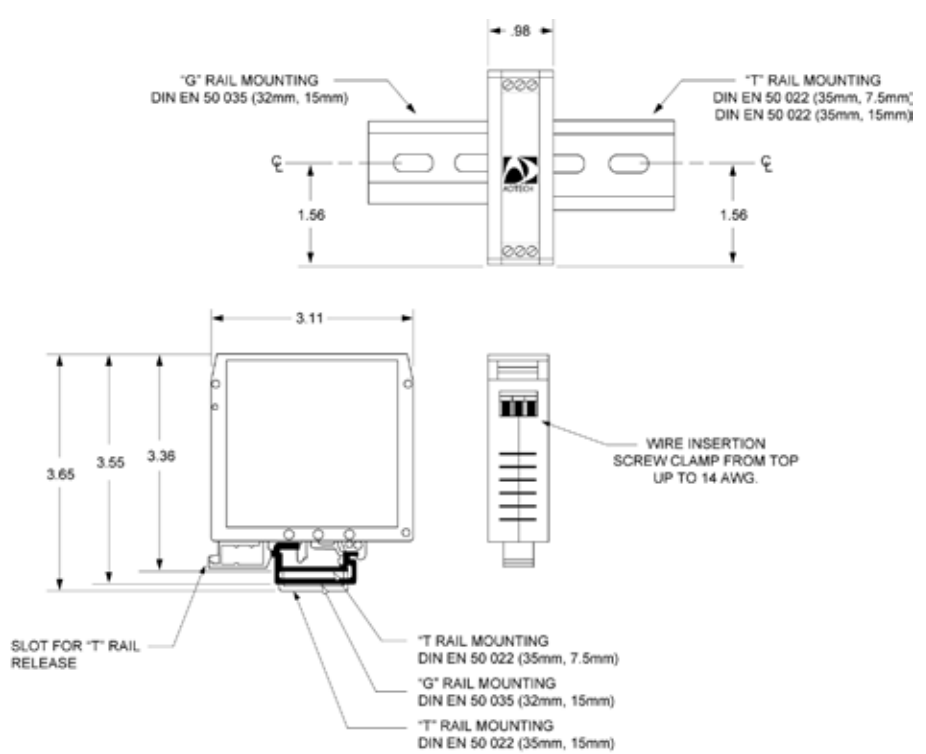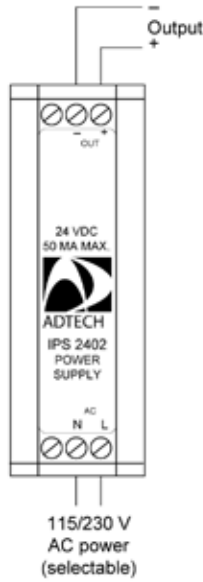

## INPUT / OUTPUT

INPUT POWER:  
115 VAC  $\pm$  10%, 50/60 HZ. .7 PF  
OR  
230 VAC  $\pm$ 10%, 50/60 HZ. .7 PF

OUTPUT VOLTAGE:  
26 VDC  $\pm$ 5% @ 50 MA.

24 VDC MIN., 28 VDC MAX. UNDER  
ALL LINE AND LOAD CONDITIONS

FIELD JUMPER SELECTABLE

## PERFORMANCE

OUTPUT REGULATION:  $\pm$ 2% (LINE AND LOAD)

OUTPUT CURRENT LIMIT: 65 MA DC MAX.

OUTPUT AUCTIONEERING: DIODE COUPLED OUTPUT

OUTPUT OVERLOAD: INDEFINITE SHORT CIRCUIT 65 MA MAX.

OUTPUT RIPPLE: 15 MV P-P MAX.

OUTPUT ISOLATION: INPUT/OUTPUT/HOUSING:1500 VAC, 2100 VDC HIPOT.

TEMPERATURE RANGE: OPERATING: -31°C TO 70 °C (-24 °F to 158 °F)  
STORAGE: -40 °C TO 85 °C (-40 °F TO 185 °F)

## POWER

SEE INPUT (NO SEPARATE POWER)

## MECHANICAL

ELECTRICAL CLASSIFICATION: GENERAL PURPOSE

MOUNTING: DIN SURFACE: (H 28) OPTIONAL  
NEMA 4 OR 7

CONNECTION: SCREW COMPRESSION TYPE  
ACCEPTS UP TO 14 AWG

WEIGHT: NET UNIT: 9.0 OZ (257 GRAMS)  
SHIPPING: 16.0 OZ (455 GRAMS)

## OPTIONS

OPTION NUMBER

DESCRIPTION

H 15D

EXPLOSION PROOF: CLASS 1, GROUP B,C &D

H 26

SURFACE MOUNTING (SPECIFY)

H 27

NEMA 4 ENCLOSURE

H 29

T 35 DIN "T" RAIL TWO FEET LONG

H 30

T 32 DIN "G" RAIL TWO FEET LONG

P 5

230 VAC PRIME POWER

### Ordering Information

- Model number
- Prime Power
- Housing and miscellaneous options

Please refer to the Housing and/or Option Section for more specific and detailed information.

REPRESENTED BY:

ADTECH

95 Mt. Read Blvd # 149

Rochester, New York 14611 USA

Phone: 1.585.698.1845

Fax: 1.585.6970445

www.adtech-inst.com